


## NOTES

- 1.THIS ALL COMPONENTS. DETAIL IS DIAGRAMMATIC ONLY. ALL ITEMS SHALL BE ARRANGE PIPING RIGIDLY SUPPORTED. TO PROVIDE READY ACCESS
- 2.DIMENSIONS WILL MINIMUM SIZE OF ALL HARDWARE AND LOCK BRACKETS SHALL BE 304 STAINLESS 36 INCH MINIMUM VARY BOX SHALL BE 48 INCHES STRUCTURAL ALUMINUM ACCORDING TO LINE SIZE. BY 48 INCHES **ACCESS** HATCH COVER. WITH A STEEL. 24 INCH E
- 3.PRESSURE SHALL **PRESSURE** WITH THE 쁌 INITIAL 유 0 SWITCH SHALL P.S.I. 20 P.S.I. SETTING TO CUT OFF PU AND THE ON AND OFF D ADJUSTABLE. CUT OFF PUMP STATION AT A FORCE PUMP DIFFERENTIAL MA N N

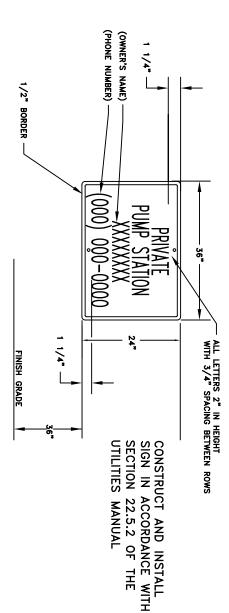

## PRIVATE PUMP STATION PRES SURE **SWITCH** AND SIGNAGE DETAILS